


CHECK AND FOOT VALVES


1

104

ROMA® CHECK VALVE



SUITABLE FOR DOMESTIC WATER SERVICES, HEATING AND AIR-CONDITIONING PLANTS, COMPRESSED AIR SYSTEMS. IT CAN BE INSTALLED IN ANY POSITION: VERTICAL, HORIZONTAL, OBLIQUE.
SUITABLE FOR USE WITH GASOLINE AND FUELS IN GENERAL TOO.

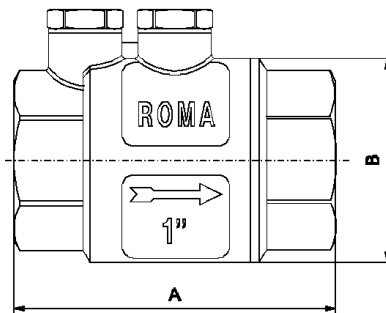


Body in brass
Plate in stainless steel
Seal in Viton®
Pin in brass
Spring in stainless steel
Outlet plugs in brass, thread 1/4"
Minimum working temperature: -20°C
Maximum working temperature: 100°C with water, 150°C with fluid hydrocarbons or compressed air.
Threads: ISO228
(equivalent to DIN259 and BS2779)

SIZE	3/8"	1/2"	3/4"	1"	1" 1/4	1" 1/2	2"
A (mm)	63	68.5	69.5	79	84	93.5	108
B (mm)	48.5	48.5	56	62	74	84.5	100.5
WORKING PRESSURE kg/cm ² bar	25	25	25	25	18	18	18
WORKING PRESSURE psi	360	360	360	360	260	260	260

102

STRAINER FOR EUROPA®, YORK®, ROMA® CHECK VALVES

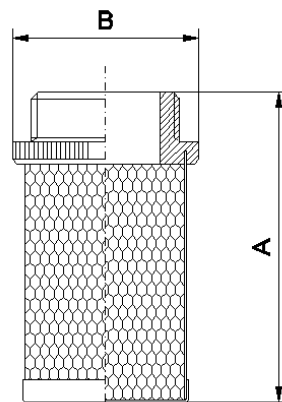

Filtration degree:
-3/8" through 2": 1200µm
-2" through 4": 2000µm
Strainer in stainless steel
Threaded end in nylon
Thread: ISO228 (equivalent to DIN259 and BS2779)

SIZE	3/8"	1/2"	3/4"	1"	1" 1/4	1" 1/2	2"	2" 1/2	3"	4"
A (mm)	42	47	57	69	75	83	98	123	138	152.5
B (mm)	22.5	28	33	41.5	50	55	68	86	102	129



ART. 104-102